


LNE-K 塑料电缆防水接头

Nylon Waterproof Cable Gland

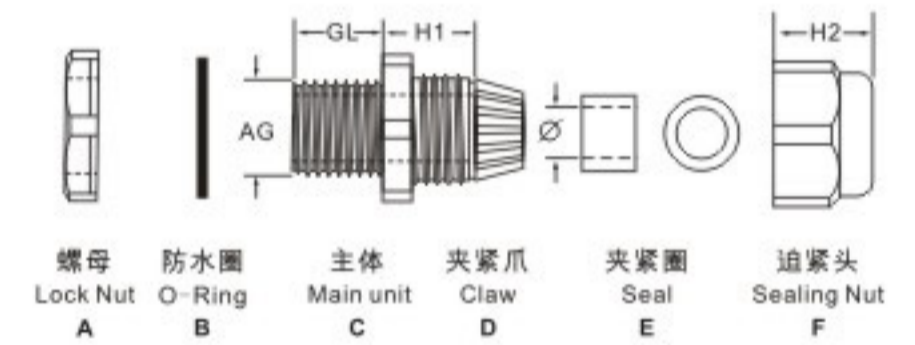

技术参数

产品材质	A.C.D.F部位采用尼龙制成, B.E部位采用丁腈橡胶制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	公制 (M)
产品颜色	黑色、灰色 (特殊颜色可定做)。
产品认证	RoHS、CE认证
防护等级	IP68
产品特性	特殊夹紧爪与密封件特殊之设计, 配合压紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。




Technical Parameters

Product material	Part A, C, D and F are PA material; Part B and E Chemigum material.
Working temperature	-40°C ~ +100°C, instantaneously can be 120°C.
Specification of thread	Metric
Certification	RoHS, CE
Color	Black and gray (Customized colors are available).
Protection classification	IP68
Property	With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet Φ	外径(mm) Outer Diameter AG	螺纹长度(mm) Thread Length GL	(mm) H1+H2	包装单位(只/包) Packaging Unit PCS
LNE-K-M12B-6	LNE-K-M12G-6	M12×1.5	3-6	12.0	8.0	20.0	100
LNE-K-M14B-8	LNE-K-M14G-8	M14×1.5	4-8	14.0	8.0	22.0	100
LNE-K-M16B-8	LNE-K-M16G-8	M16×1.5	4-8	16.0	8.0	22.0	100
LNE-K-M18B-10	LNE-K-M18G-10	M18×1.5	5-10	18.0	8.0	24.0	100
LNE-K-M18B-14	LNE-K-M18G-14	M18×1.5	10-14	18.0	8.0	24.0	100
LNE-K-M20B-12	LNE-K-M20G-12	M20×1.5	6-12	20.0	9.0	27.0	50
LNE-K-M20B-14	LNE-K-M20G-14	M20×1.5	10-14	20.0	9.0	27.0	50
LNE-K-M22B-14	LNE-K-M22G-14	M22×1.5	10-14	22.0	10.0	28.0	50
LNE-K-M24B-14	LNE-K-M24G-14	M24×1.5	10-14	24.0	10.0	28.0	50
LNE-K-M25B-14	LNE-K-M25G-14	M25×1.5	10-14	25.0	10.0	28.0	50
LNE-K-M25B-18	LNE-K-M25G-18	M25×1.5	13-18	25.0	11.0	28.0	50
LNE-K-M27B-18	LNE-K-M27G-18	M27×1.5	13-18	27.0	11.0	30.0	50
LNE-K-M27B-18	LNE-K-M27G-18	M27×2.0	13-18	27.0	11.0	30.0	50
LNE-K-M30B-18	LNE-K-M30G-18	M30×2.0	13-18	30.0	11.0	30.0	50
LNE-K-M32B-21	LNE-K-M32G-21	M32×1.5	16-21	32.0	11.0	33.0	20
LNE-K-M33B-21	LNE-K-M33G-21	M33×2.0	16-21	33.0	11.0	40.0	20
LNE-K-M40B-32	LNE-K-M40G-32	M40×1.5	22-32	40.0	11.0	40.0	10
LNE-K-M42B-32	LNE-K-M42G-32	M42×2.0	22-32	42.0	11.0	40.0	10
LNE-K-M48B-32	LNE-K-M48G-32	M48×2.0	22-32	48.0	13.0	45.0	10
LNE-K-M50B-38	LNE-K-M50G-38	M50×1.5	32-38	50.0	17.0	47.0	10
LNE-K-M63B-44	LNE-K-M63G-44	M63×1.5	37-44	63.0	17.0	47.0	10

Nylon Waterproof Cable Gland

LNE-K 塑料电缆防水接头

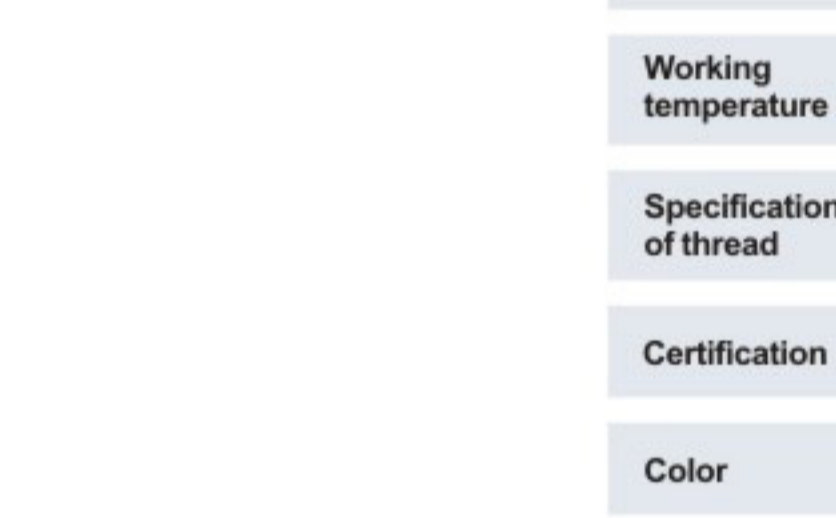

技术参数

产品材质	A.C.D.F部位采用尼龙制成, B.E部位采用丁腈橡胶制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	德制 (PG)、英制 (G)
产品颜色	黑色、灰色 (特殊颜色可定做)。
产品认证	RoHS、CE认证
防护等级	IP68
产品特性	特殊夹紧爪与密封件特殊之设计, 配合压紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。



Technical Parameters


Product material	Part A, C, D and F are PA material; Part B and E Chemigum material.
Working temperature	-40°C ~ +100°C, instantaneously can be 120°C.
Specification of thread	PG, G
Certification	RoHS, CE
Color	Black and gray (Customized colors are available).
Protection classification	IP68
Property	With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet Φ	外径(mm) Outer Diameter AG	螺纹长度(mm) Thread Length GL	(mm) H1+H2	包装单位(只/包) Packaging Unit PCS
LNE-K-PG7B	LNE-K-PG7G	PG7	3-6	12.5	8.0	20.0	100
LNE-K-PG9B	LNE-K-PG9G	PG9	4-8	15.2	8.0	22.0	100
LNE-K-PG11B	LNE-K-PG11G	PG11	5-10	18.6	8.0	24.0	100
LNE-K-PG13.5B	LNE-K-PG13.5G	PG13.5	6-12	20.4	9.0	27.0	50
LNE-K-PG16B	LNE-K-PG16G	PG16	10-14	22.5	10.0	28.0	50
LNE-K-PG21B	LNE-K-PG21G	PG21	13-18	28.3	11.0	30.0	50
LNE-K-PG29B	LNE-K-PG29G	PG29	18-25	37.0	11.0	38.0	20
LNE-K-PG36B	LNE-K-PG36G	PG36	22-32	47.0	13.0	45.0	10
LNE-K-PG42B	LNE-K-PG42G	PG42	32-38	54.0	13.0	47.0	10
LNE-K-PG48B	LNE-K-PG48G	PG48	37-44	59.3	14.0	47.0	10

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	螺纹标准(英制) Thread standard(G)	卡口范围(mm) Range Of Bayonet Φ	外径(mm) Outer Diameter AG	螺纹长度(mm) Thread Length GL	(mm) H1+H2	包装单位(只/包) Packaging Unit PCS
LNE-K-G1/4B-8	LNE-K-G1/4G-8	G1/4	4-8	13.2	8.0	22.0	100
LNE-K-G3/8B-10	LNE-K-G3/8G-10	G3/8	5-10	16.5	8.0	24.0	100
LNE-K-G1/2B-12	LNE-K-G1/2G-12	G1/2	6-12	21.3	9.0	27.0	50
LNE-K-G1/2B-14	LNE-K-G1/2G-14	G1/2	10-14	21.3	10.0	28.0	50
LNE-K-G3/4B-18	LNE-K-G3/4G-18	G3/4	13-18	26.6	11.0	30.0	50
LNE-K-G1B-21	LNE-K-G1G-21	G1	16-21	33.4	11.0	40.0	20
LNE-K-G1B-25	LNE-K-G1G-25	G1	18-25	33.4	13.0	45.0	20
LNE-K-G1-1/4B-32	LNE-K-G1-1/4G-32	G1-1/4	22-32	42.1	13.0	45.0	10
LNE-K-G1-1/2B-32	LNE-K-G1-1/2G-32	G1-1/2	22-32	47.8	13.0	45.0	10
LNE-K-G2B-44	LNE-K-G2G-44	G2	37-44	59.6	17.0	47.0	10

LNE-KD 多孔塑料电缆防水接头

Multi Hole Nylon Waterproof Cable Gland

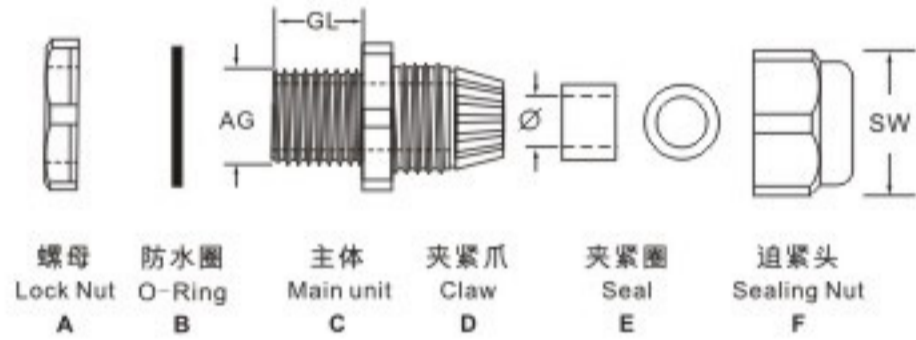

技术参数

产品材质	A,C,D,F部位采用尼龙制成, B,E部位采用丁腈橡胶制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	德制 (PG)
产品颜色	黑色、灰色 (特殊颜色可定做)。
产品认证	RoHS、CE认证
防护等级	IP68
产品特性	特殊夹紧爪与密封件特殊的设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。



Technical Parameters

Product material	Part A, C, D and F are PA material; Part B and E Chemigum material.
Working temperature	-40°C ~ +100°C, instantaneously can be 120°C.
Specification of thread	PG
Certification	RoHS, CE
Color	Black and gray (Customized colors are available).
Protection classification	IP68
Property	With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	螺纹标准(德制) Thread standard(PG)	孔数×孔径(mm) Hole Count×Bore Diameter HxB	外径(mm) Outer Diameter AG	螺纹长度(mm) Thread Length GL	扳手尺寸(mm) Wrench SW	包装单位(只/包) Packaging Unit PCS
LNE-KD-PG9/2*3B	LNE-KD-PG9/2*3G	PG9	2*3	15.2	6.5	18.0	100
LNE-KD-PG9/4*1B	LNE-KD-PG9/4*1G	PG9	4*1	15.2	6.5	18.0	100
LNE-KD-PG13.5/2*5B	LNE-KD-PG13.5/2*5G	PG13.5	2*5	20.4	7.5	22.0	50
LNE-KD-PG13.5/7*2B	LNE-KD-PG13.5/7*2G	PG13.5	7*2	20.4	7.5	22.0	50
LNE-KD-PG13.5/6*3B	LNE-KD-PG13.5/6*3G	PG13.5	6*3	20.4	7.5	22.0	50
LNE-KD-PG16/2*6B	LNE-KD-PG16/2*6G	PG16	2*6	22.5	7.0	24.0	50
LNE-KD-PG21/4*6B	LNE-KD-PG21/4*6G	PG21	4*6	28.3	8.0	30.0	50
LNE-KD-PG21/2*7B	LNE-KD-PG21/2*7G	PG21	2*7	28.3	8.0	30.0	50
LNE-KD-PG21/3*7B	LNE-KD-PG21/3*7G	PG21	3*7	28.3	8.0	30.0	50
LNE-KD-PG21/2*6/2*10B	LNE-KD-PG21/2*6/2*10G	PG21	2*6/2*10	28.3	8.0	30.0	50
LNE-KD-PG21/2*8B	LNE-KD-PG21/2*8G	PG21	2*8	28.3	8.0	30.0	50
LNE-KD-PG21/2*6B	LNE-KD-PG21/2*6G	PG21	2*6	28.3	8.0	30.0	50
LNE-KD-PG21/3*7B	LNE-KD-PG21/3*7G	PG21	3*7	28.3	8.0	30.0	50
LNE-KD-PG29/3*9B	LNE-KD-PG29/3*9G	PG29	3*9	37.0	9.5	40.0	20
LNE-KD-PG29/2*8.5B	LNE-KD-PG29/2*8.5G	PG29	2*8.5	37.0	9.5	40.0	20
LNE-KD-PG29/4*9B	LNE-KD-PG29/4*9G	PG29	4*9	37.0	9.5	40.0	20
LNE-KD-PG29/2*12B	LNE-KD-PG29/2*12G	PG29	2*12	37.0	9.5	40.0	20
LNE-KD-PG36/2*15B	LNE-KD-PG36/2*15G	PG36	2*15	47.0	12.0	50.0	10
LNE-KD-PG36/5*9B	LNE-KD-PG36/5*9G	PG36	5*9	47.0	12.0	50.0	10

Anti-bending Nylon Cable Gland

LNE-KFW 防折断塑料电缆接头




技术参数

产品材质	采用尼龙制成, A部位采用丁腈橡胶制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	公制 (M)、德制 (PG)
产品颜色	黑色、灰色 (特殊颜色可定做)。
产品认证	RoHS、CE认证
防护等级	IP68
产品特性	特殊夹紧爪与密封件特殊的设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	Part A, C, D and F are PA material; Part B and E Chemigum material.
Working temperature	-40°C ~ +100°C, instantaneously can be 120°C.
Specification of thread	Metric, PG
Certification	RoHS, CE
Color	Black and gray (Customized colors are available).
Protection classification	IP68
Property	With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

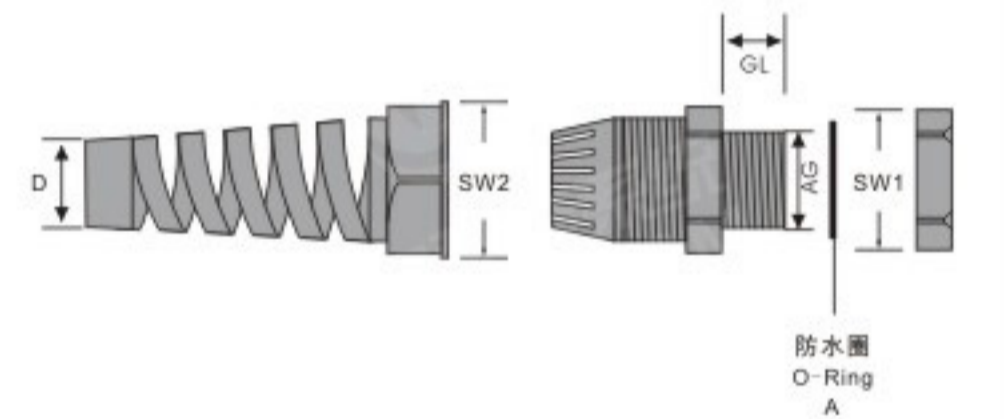

订货号 Order No. No.	螺纹标准(公制) Thread standard(M)	卡套范围(mm) Range Of Bayonet Φ	外径(mm) Outer Diameter AG	(mm) D	螺纹长度(mm) Thread Length GL	扳手尺寸(mm) Wrench SW1 SW2	包装单位(只/包) Packaging Unit PCS
LNE-KFW-M12	M12	3-6.5	12.0	6.8	8.5	15 18	50
LNE-KFW-M16	M16	4-8	16.0	10.3	10.0	19 22	50
LNE-KFW-M20	M20	8-12	20.0	14.3	10.0	27 27	50
LNE-KFW-M25	M25	13-18	25.0	18.4	10.0	33 33	50
LNE-KFW-M32	M32	15-22	32.0	20.5	10.0	40 40	50

订货号 Order No. No.	螺纹标准(德制) Thread standard(PG)	卡套范围(mm) Range Of Bayonet Φ	外径(mm) Outer Diameter AG	(mm) D	螺纹长度(mm) Thread Length GL	扳手尺寸(mm) Wrench SW1 SW2	包装单位(只/包) Packaging Unit PCS
LNE-KFW-PG7	PG7	3-6.5	12.5	6.8	8.5	15 17	50
LNE-KFW-PG9	PG9	4-8	15.2	8.2	6.0	19 22	50
LNE-KFW-PG11	PG11	5-10	18.6	10.3	6.0	22 24	50
LNE-KFW-PG13.5	PG13.5	8-12	20.4	12.3	6.5	24 27	50
LNE-KFW-PG16	PG16	10-14	22.5	14.3	6.5	27 30	50
LNE-KFW-PG21	PG21	13-18	28.3	18.4	7.0	33 36	50